NOTES: UNLESS OTHERWISE SPECIFIED

1. PREPARED IAW DOCUMENTS LISTED:
   GRAPHIC SYMBOLS; ANSI Y32.2
   REFERENCE DESIGNATORS; ANSI Y32.16
   DEFINITIONS OF ENGR DWGS; ANSI Y14.15

2. FOR ASSEMBLY SEE C70724.

3. RESISTANCE VALUES ARE IN OHMS, 1/8W, +/- 1%.

4. CAPACITANCE VALUES ARE IN MICROFARADS, 50V, +/-10%.

REV	DESCRIPTION	DATE	APP	REV BY
0	INITIAL RELEASE ECO 99-0116	4-29-99	TMC	--
1	INITIAL RELEASE ECO 00-0163	4-29-99	TMC	VF
2	INITIAL RELEASE ECO 00-0275	3-17-00	AA	VF

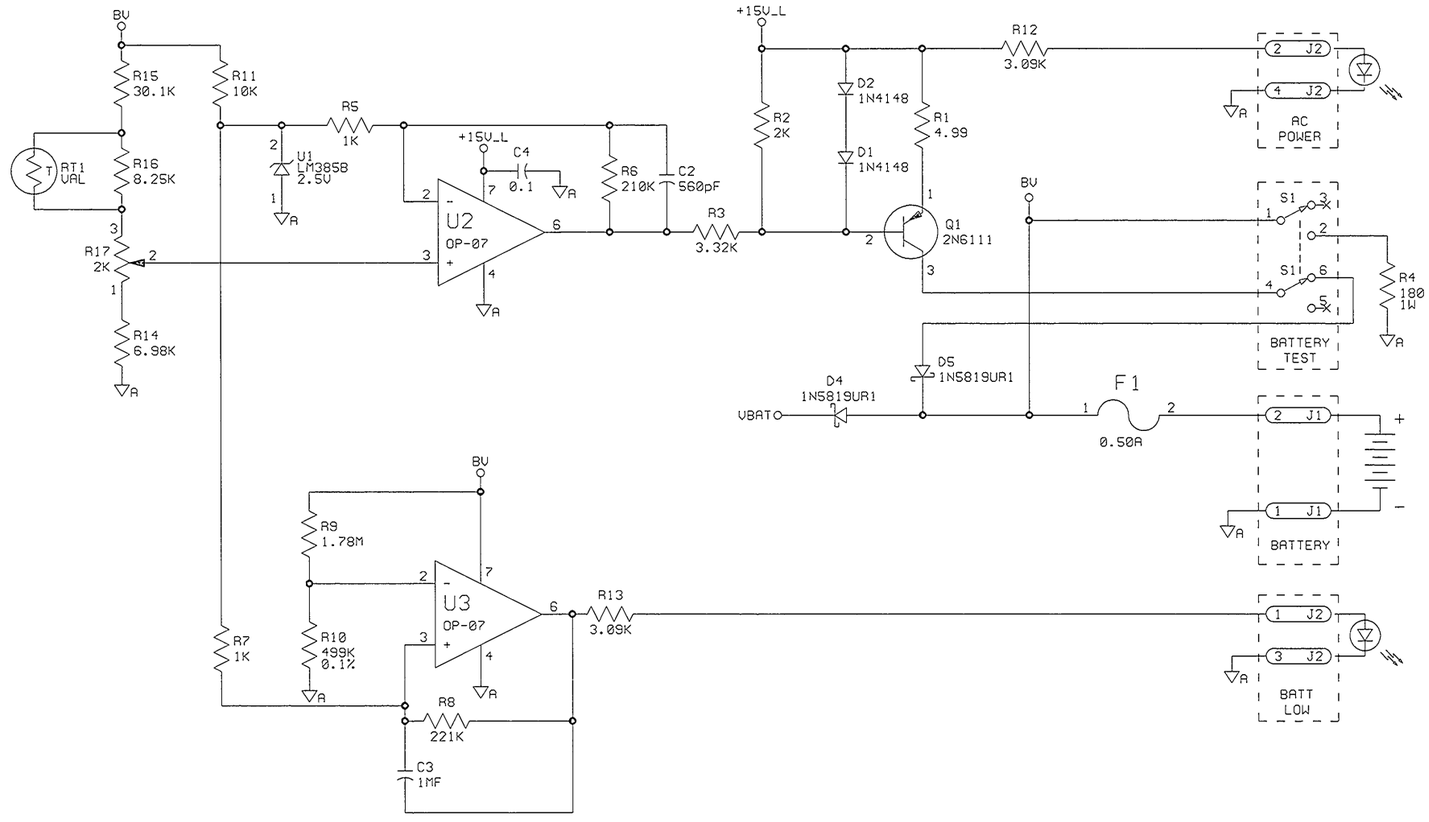

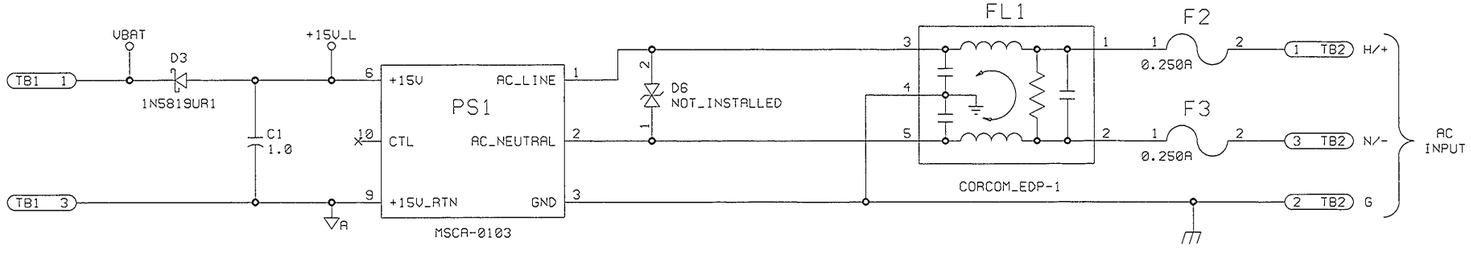

DO NOT SCALE DRAWING

TOLERANCES UNLESS OTHERWISE SPECIFIED: ANGULAR ± 1/2 DEG
LINEAR .X = ± .1, .XX = ± .03, .XXX = ± .010

THIS DRAWING IS THE PROPERTY OF TELEDYNE ANALYTICAL INSTRUMENTS AND CONTAINS CONFIDENTIAL INFORMATION IT IS NOT TO BE COPIED, REPRODUCED OR USED WITHOUT WRITTEN PERMISSION.

TELEDYNE ANALYTICAL INSTRUMENTS
A BUSINESS UNIT OF TELEDYNE ELECTRONIC TECHNOLOGIES

	SIGNATURES	DATE
N/	DRFT: T.MCINTYRE	2/23/99
P/	CHK:	
I/	APPR:	
F/	ENGR:	
O/	S.O.:	
REFERENCE	CAD ID: D70723-1.SCH	

SCHEMATIC DIAGRAM 3350 BATTERY CHARGER BOARD

SCALE NONE
SIM
SHEET 1 OF 1
MATL.
DWG NO. D- 70723
REV 2