

MODEL LGA-4000Z

TUNABLE DIODE LASER GAS ANALYZER



Teledyne's LGA-4000Z series leverages the latest in Tunable Diode Laser Absorption Spectroscopy (TDLAS) to achieve an ultra-fast gas measurement in-line without resorting to extraction and sample conditioning. By tuning the laser to a specific absorption wavelength, based on the gas of interest, the attenuation of the light through a sample cell and the detector can be correlated to the concentration of each gas, per Beer-Lambert Law. The laser provides a narrow absorption band which minimizes the effect of interfering compounds in the process

The System

The LGA-4000Z consists of a transmitter, receiver and connection box. The transmitter drives the tunable diode to emit a laser of a certain wavelength to pass through the environment being measured until it reaches the receiver. The receiver then performs a photo-electrical conversion, signal processing and spectrum data analysis to obtain the measuring result. The connection box, containing the I/O Interface, makes the connection of the power cable and the signal cable convenient.

Wavelength Modulation Spectroscopy (WMS)

WMS is a method used to significantly increase the sensitivity by reducing the low-frequency noise. The laser light's intensity is modulated at a high frequency to create a periodic signal to the detector. The signal is then encoded and measured at a high frequency, eliminating the effect of low frequency noise.




* For extractive option only



LGA-4000ZA

Features

- Flame proof design, IP-66 rated enclosure, ATEX and IECEx
- Zone 1 IIC T6 Certified
- Modular design simplifies service and field part replacements
- Integral automatic gain control (AGC) algorithm ensure optimal signal integrity
- Excellent long-term drift characteristics, less than $\pm 1\%$ FS over 6 months
- Local OLED display with magnetic buttons to maintain area classification
- Low power (rated 10W)
- 2 x 4-20mA outputs, 2 x alarm relays, RS-485 / RS-232/ GPRS communications

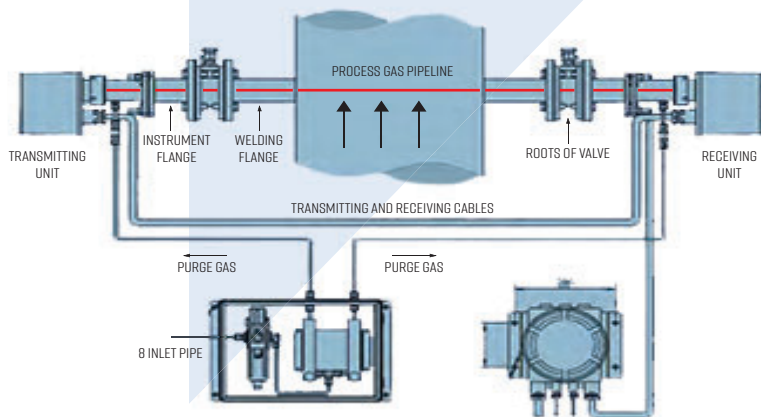

SPECIFICATIONS

Certifications	ATEX and IECEx Zone 1 IIC T6
Path Length	Typically 2-65 feet (0.6-20 meters), application-dependent
Repeatability	± 1% FS
Linearity	± 1% FS
Response Time	Typically < 1 second (application-dependent)
Utility Gases	Air or Nitrogen for purge (application-dependent), 30-115 psig (0.3-0.8 MPa)
Outputs	Analog: 2 x 4-20mA (isolated), 750 ohm max load Discrete: 2 x relay contact, Form-C type, rated 1A @ 24 VDC Communications: RS-485 / RS-232
Inputs	2 x 4-20mA (for pressure and temperature compensation)
Power	24 VDC 10 W
Temperature	-4° to 140°F (-20° to 60°C)

GAS DETECTION PARAMETERS

Gas	Min Range	Max Range	Detection Limit
Acetylene (C ₂ H ₂)	0-50 ppm	0-100%	0.5 ppm
Ammonia (NH ₃)	0-10 ppm	0-100%	0.5 ppm
Carbon Dioxide (CO ₂)	0-1000 ppm	0-100%	40 ppm
Carbon Monoxide (CO)	0-1000 ppm	0-100%	40 ppm
Ethylene (C ₂ H ₄)	0-100 ppm	0-100%	1 ppm
Hydrochloric Acid (HCl)	0-100 ppm	0-50%	0.1 ppm
Hydrofluoric Acid (HF)	0-20 ppm	0-50%	0.05 ppm
Hydrogen Sulfide (H ₂ S)	0-100 ppm	0-100%	5 ppm
Methane (CH ₄)	0-200 ppm	0-100%	10 ppm
Oxygen (O ₂)	0-1%	0-25%	0.01%
Water / Moisture (H ₂ O)	0-100 ppm	0-100%	0.1 ppm



TELEDYNE
ADVANCED MONITORING SOLUTIONS
 Everywhereyoulook™

CALIFORNIA OFFICE
 CITY OF INDUSTRY, CA
 UNITED STATES OF AMERICA (USA)
 TEL: +1 626.934.1500

COLORADO OFFICE
 ENGLEWOOD, CO
 UNITED STATES OF AMERICA (USA)
 TEL: +1 303.792.3300

MIDDLE EAST OFFICE
 SHARJAH
 UNITED ARAB EMIRATES (UAE)
 TEL: +971.6557.9727

SOUTHEAST ASIA OFFICE
 PETALING JAYA
 MALAYSIA
 TEL: +603.7805.7712

ASK_TAI@TELEDYNE.COM
WWW.TELEDYNE-AI.COM

GOTML@TELEDYNE.COM
WWW.TELEDYNE-ML.COM